


.....

OPTRAL

CDIR-M

Militar Breakout Cable (Up to 12 FO)



Descripción cable


- 01. Tight Buffer Fibre (0.9 mm)
- 02. Aramid
- 03. Individual Jacket (Ø 2.5 mm)
- 04. Aramid
- 05. Ripcord
- 06. Outer Jacket

Norms / Approvals

Based on military norm MIL-C-85045

Options

- Easy-Strip Buffer
- PU-LSZH Jacket

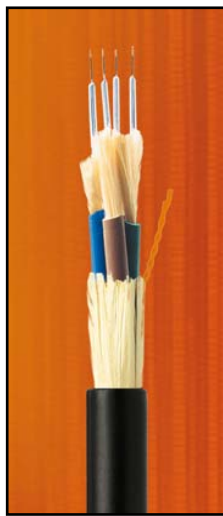

Advantages

Compact / Resilient / Tough / Excellent mechanical resistance / Easy to strip (gel free) / Totally dielectric / Direct connectorization / Based on military norm



TOTALLY DIELECTRIC



MOISTURE PROTECTED



HIGH FLEXIBILITY



ULTRAVIOLET RESISTANCE

All technical specifications are subject to change without prior notice. Consult OPTRAL for the latest edition.

	SPECIFICATIONS				
Fibres	2	4	6	8	12
Subcables strength members	Aramid Yarns				
Subcables Ø (mm)	2.5				
Subcables jacket	Thermoplastic LSZH ¹				
Identification	Colours ²				
Outer jacket	Polyurethane				
Colour	Black				
Weight (Kg/Km)	63	63	87	124	202
Outer Ø (mm)	9.0 ± 0.3	9.0 ± 0.3	10.5 ± 0.3	12.2 ± 0.5	15.5 ± 0.5
Tensile Load Perm / Inst (N)	900 / 1600	1200 / 2150	1500 / 2700	1900 / 3400	2500 / 3500
Crush (N)	2000				
Temperature Range	-40°C to +70°C				
Min. Bending Radius	20 x Outer Ø				
Max. Length	3200 m				

¹ LSZH – Halogen free, low smoke and flame retardant thermoplastic compound.

² Colour Fibres = Blue – Orange – Green – Brown – Grey – White – Red – Black – Yellow – Violet – Pink – Turquoise.

.....